



State of California

Rev. 134B232

CONSTRUCTION CHANGE ORDER

OVERVIEW

Change Order Number: 1	
Project Name: Anne Dekun	Project Number: 250033BC
Location of Work: 361 Arroyo Drive S. San Francisco Ca. 94080	
Contractor Name: Restoration Specialists, Inc	Client Name: Anne Dekun
Date of Issue: 11/28/2025	

CHANGE TO CONTRACT

Change Description:

Please see the attached approved insurance supplement named 05-80C1-98PC and dated 9/30/2025

CHANGE IN CONTRACT PRICE

Original Contract Price: \$54,448.97

Previous Change Order Amounts: \$0.00

Change in Price: \$7,012.90

New Contract Price: \$61,461.87

Original Contract Completion Date: TBD - Working on Engineering/permits

New Contract Completion Date: TBD - Working on Engineering/permits

APPROVAL

Anne Dekun (Dec 11, 2025 16:36:21 PST)

Client
Signature

Anne Dekun

Client
Full Name

Restoration Specialists,
Inc

Contractor
Full Name

Charles Cordova

Contractor Representative
Signature

Charles Cordova - Director of Construction

Contractor Representative
Name and Title



State Farm
P.O. Box 106169
Atlanta, GA 30348-6169
Fax: 1-844-236-3646
statefarmfireclaims@statefarm.com

Structural Damage Claim Policy

This estimate is priced based on estimated market pricing for the cost of materials, labor, and other factors at the time of the loss.

Adjustments in market pricing and timing of the repairs may impact the final cost of covered repairs. Should you or the contractor you select have questions concerning our estimate, please contact us. If your contractor's estimate is higher than ours, you should contact us prior to beginning repairs. State Farm will work with you and your contractor to determine the actual and necessary cost of covered repairs at the time repairs will be completed, subject to policy terms, conditions and limits.

- We want you to receive quality repair work to restore the damages to your property.
- We will provide you with a detailed estimate of the scope of the damage and costs of repairs. Should the contractor you select have questions concerning our estimate, they should contact your claim representative directly.
- Depending upon the complexity of your repair, our estimate may or may not include an allowance for general contractor's overhead and profit. If you have questions regarding general contractor's overhead and profit and whether general contractor services are appropriate for your loss, please contact your claim representative before proceeding with repairs.
- There may be building codes, ordinances, laws, or regulations that affect the repairs of your property. These items may or may not be covered by your policy. Please contact your claim representative if you have any questions regarding coverage which may be available under your policy.
- State Farm® cannot authorize any contractor to proceed with work on your property. Repairs should proceed only with your authorization.
- State Farm does not guarantee the quality of the workmanship of any contractor or guarantee that the work will be accomplished within any specific time frame.
- It is understood that the contractor is hired by you, our insured, and that they work for you - not State Farm.

If you have any questions or need additional information regarding your claim, please contact your claim representative immediately.



Building Estimate Summary Guide

This summary guide is based on a sample estimate and is provided for reference only.

Please refer to the estimate for specifics of your claim.

State Farm Insurance

Insured: Smith, Joe & Jane	Estimate: 00-0000-000
Property: 1 Main Street	Claim number: 00-0000-000
Anywhere, IL 00000-0000	Policy Number: 00-00-0000-0
Type of Loss: Other	Price List: ILBL8F_MAR 13
Deductible: \$1,000.00	Restoration/Service/ Remodel
	F = Factored In, D = Do Not Apply

Summary for Dwelling

Line Item Total [1]		5,953.10
Material Sales Tax	@ 10.000% x 1,520.00	
Subtotal		6,105.10
General Contractor Overhead [2]	@ 10.0% x 6,105.10	610.51
General Contractor Profit	@ 10.0% x 6,105.10	
Replacement Cost Value (Including General Contractor Overhead and Profit [3])		7,326.12
Less Depreciation (Including Taxes) [4]		(832.50)
Less General Contractor Overhead & Profit on Recoverable & Non - recoverable Depreciation		(166.50)
Less Deductible [5]		
Net Actual Cash Value Payment [6]		

Maximum Additional Amounts Available If Incurred:

Total Line Item Depreciation (Including Taxes) [4]	832.50	
Less Non - recoverable Depreciation (Including Taxes) [7]		
Subtotal		312.50
General Contractor O&P on Depreciation	166.50	
Less General Contractor O&P on Non - recoverable Depreciation		
Subtotal		
Total Maximum Additional Amounts Available If Incurred [8]		
Total Amount of Claim If Incurred [9]		

Claim Representative

ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND LIMITS OF YOUR POLICY.

- 1. Line Item Total** – Total value of all line items in the estimate plus possible adjustments for *labor minimums*. *Labor Minimum* is to cover a certain minimum number of hours for drive-time, set up time and applicable administrative costs and repairs.
- 2. General Contractor's Overhead and Profit** – General contractor's charge for coordinating your repairs.
- 3. Replacement Cost Value (RCV)** – Estimated cost to repair or replace damaged property.
- 4. Depreciation** – The decrease in the value of property over a period of time due to wear, tear, condition, and obsolescence. A portion or all of this amount may be eligible for replacement cost benefits.
- 5. Deductible** – The insurer will pay for losses, up to the policy limits, in excess of your applicable deductible.
- 6. Net Actual Cash Value Payment (ACV)** – The repair or replacement cost of the damaged part of the property less *depreciation* and *deductible*.
- 7. Non Recoverable Depreciation** – *Depreciation* applied to items that are not eligible for replacement cost benefits.
- 8. Total Maximum Additional Amount if Incurred** – Total amount of recoverable depreciation after actual repair or replacement of the property.
- 9. Total Amount of Claim if Incurred** – Total amount of the claim, including *net actual cash value payment* and *total maximum additional amount available if incurred*.

State Farm

DEKUN, ANNE

05-80C1-98PC

Insured:	DEKUN, ANNE	Estimate:	05-80C1-98PC
Property:	361 Arroyo Dr	Claim Number:	0580C198P
	S San Fran, CA 94080-4109	Policy Number:	05B6S5960
Cellular:	650-201-6334	Price List:	CAPE28_FEB25
Type of Loss:	Fire		Restoration/Service/Remodel
Deductible:	\$0.00		
Date of Loss:	2/1/2025		
Date Inspected:	3/31/2025		

Summary for Coverage A - Dwelling - 33 Fire, Lightning, & Removal

Line Item Total	46,759.68
California Lumber Assessment Fee	0.50
California Carpet Stewardship Assessment Fee	47.13
Material Sales Tax	1,339.98
Subtotal	48,147.29
General Contractor Overhead	4,814.79
General Contractor Profit	4,814.79
Replacement Cost Value (Including General Contractor Overhead and Profit)	57,776.87
Less Deductible	(0.00)
Less Prior Claim Payment	(54,187.10)
Net Payment	\$3,589.77

Toth, Jessica
844-458-4300

ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND LIMITS OF YOUR POLICY.

Any person who knowingly presents false or fraudulent information to obtain or amend insurance coverage or to make a claim for the payment of a loss is guilty of a crime and may be subject to fines and confinement in state prison.

State Farm

DEKUN, ANNE

05-80C1-98PC

Insured:	DEKUN, ANNE	Estimate:	05-80C1-98PC
Property:	361 Arroyo Dr	Claim Number:	0580C198P
	S San Fran, CA 94080-4109	Policy Number:	05B6S5960
Cellular:	650-201-6334	Price List:	CAPE28_FEB25
Type of Loss:	Fire		Restoration/Service/Remodel
Deductible:	\$0.00		
Date of Loss:	2/1/2025		
Date Inspected:	3/31/2025		

Summary for Coverage A - Dwelling - 33 Fire, Lightning, & Removal
- BC - Code Upgrade

Line Item Total	3,685.00
Replacement Cost Value	3,685.00
Less Deductible	(0.00)
Net Payment	\$3,685.00

Toth, Jessica
844-458-4300

ALL AMOUNTS PAYABLE ARE SUBJECT TO THE TERMS, CONDITIONS AND
LIMITS OF YOUR POLICY.

Any person who knowingly presents false or fraudulent information to obtain or amend insurance coverage or to make a claim for the payment of a loss is guilty of a crime and may be subject to fines and confinement in state prison.

State Farm

DEKUN, ANNE

05-80C1-98PC

Main Level



Entry Hall

Height: 8'

269.39 SF Walls	57.87 SF Ceiling
327.26 SF Walls & Ceiling	57.87 SF Floor
36.31 LF Ceil. Perimeter	33.15 LF Floor Perimeter

Missing Wall

3' 7" X 8'

Opens into HALLWAY_TO_2

Door

2' 6" X 6' 8"

Opens into Exterior

Missing Wall - Goes to Floor

3' 2" X 6' 8"

Opens into KITCHEN

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
Walls & Ceilings					
1. Mask and prep for paint - plastic, paper, tape (per LF)	327.26 LF	2.39	8.73	158.18	949.06
2. Seal the walls and ceiling w/latex based stain blocker - one coat	327.26 SF	1.09	3.23	71.98	431.92
3. Paint the walls and ceiling - one coat	327.26 SF	1.20	6.79	79.90	479.40
4. Paint baseboard - one coat	33.15 LF	1.76	0.43	11.74	70.51
Finish Carpentry					
5. R&R Baseboard - 3 1/4"	33.15 LF	6.34	6.51	43.34	260.02
Flooring					
6. Detach & Reset T- molding - for wood flooring	16.00 LF	2.68	0.02	8.58	51.48
7. R&R Mortar bed for tile floors	57.87 SF	12.27	13.09	144.64	867.80
8. R&R Ceramic/porcelain tile	57.87 SF	35.45	33.03	416.90	2,501.42
Misc					
9. Final cleaning - construction - Residential	57.87 SF	0.51	0.00	5.90	35.41
Totals: Entry Hall			71.83	941.16	5,647.02


State Farm

DEKUN, ANNE

05-80C1-98PC

Hallway to Bedrooms

Height: 8'




304.67 SF Walls
366.18 SF Walls & Ceiling
38.08 LF Ceil. Perimeter

61.51 SF Ceiling
61.51 SF Floor
38.08 LF Floor Perimeter

Door	2' 6" X 6' 8"	Opens into Exterior
Door	2' 6" X 6' 8"	Opens into Exterior
Missing Wall	3' 7" X 8'	Opens into ENTRY_HALL2
Door	2' 6" X 6' 8"	Opens into Exterior

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
Walls & Ceilings					
10. Mask and prep for paint - plastic, paper, tape (per LF)	366.18 LF	2.39	9.76	177.00	1,061.93
11. Seal the walls and ceiling w/latex based stain blocker - one coat	366.18 SF	1.09	3.62	80.54	483.30
12. Paint the walls and ceiling - one coat	366.18 SF	1.20	7.59	89.40	536.41
13. Paint door or window opening - 1 coat (per side)	3.00 EA	38.73	1.57	23.56	141.32
14. Paint baseboard - one coat	38.08 LF	1.76	0.49	13.50	81.01
Finish Carpentry					
15. R&R Baseboard - 3 1/4"	38.08 LF	6.34	7.48	49.78	298.68
Flooring					
16. R&R Carpet - metal transition strip	9.00 LF	6.46	1.48	11.92	71.54
17. R&R Mortar bed for tile floors	61.51 SF	12.27	13.91	153.72	922.35
18. R&R Ceramic/porcelain tile	61.51 SF	35.45	35.11	443.14	2,658.78
Misc					
19. Final cleaning - construction - Residential	61.51 SF	0.51	0.00	6.28	37.65
Totals: Hallway to Bedrooms			81.01	1,048.84	6,292.97

05-80C1-98PC



DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
Walls & Ceilings					
20. Seal floor or ceiling joist system (shellac)	191.43 SF	2.49	9.83	97.30	583.79
21. Seal stud wall for odor control (shellac)	239.11 SF	1.84	10.63	90.12	540.71
22. Batt insulation - 10" - R30 - unfaced batt	191.43 SF	2.14	25.71	87.08	522.45
23. Batt insulation - 4" - R13 - unfaced batt	239.11 SF	1.17	15.58	59.08	354.42
24. 5/8" drywall - hung, taped, ready for texture	430.54 SF	3.64	34.01	320.24	1,921.42
25. 1/2" drywall - hung, taped, ready for texture	239.11 SF	3.49	17.24	170.34	1,022.07
26. Texture drywall - machine - knockdown	430.54 SF	1.55	2.13	133.88	803.35
27. Seal the walls and ceiling w/PVA primer - one coat	430.54 SF	1.05	2.55	90.94	545.56
28. Paint the walls and ceiling - one coat	430.54 SF	1.20	8.93	105.12	630.70
29. Paint door or window opening - 1 coat (per side)	1.00 EA	38.73	0.52	7.84	47.09
30. Paint window stool and apron - 1 coat	6.00 LF	4.93	0.23	5.96	35.77
31. Paint baseboard - one coat	22.23 LF	1.76	0.29	7.88	47.29

Page: 7

State Farm

DEKUN, ANNE

05-80C1-98PC

CONTINUED - Kitchen

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
32. Cabinetry - upper (wall) units	16.00 LF	195.55	195.08	664.78	3,988.66
33. Cabinetry - lower (base) units	16.00 LF	361.93	457.96	1,249.78	7,498.62
34. Cabinet panels - side, end, or back	16.00 SF	22.60	12.15	74.76	448.51
35. Toe kick - pre-finished wood - 1/2"	16.00 LF	13.46	6.89	44.46	266.71
36. Countertop subdeck - plywood	32.00 SF	5.28	5.85	34.98	209.79
37. Countertop - post formed plastic laminate	16.00 LF	70.66	68.21	239.76	1,438.53
38. Add-on for mitered corner (Countertop)	1.00 EA	166.16	0.00	33.24	199.40
Plumbing					
39. Sink - double basin - Reset	1.00 EA	164.67	0.10	32.96	197.73
40. Install Sink faucet - Kitchen	1.00 EA	133.11	0.00	26.62	159.73
41. Garbage disposal / disposer - Reset	1.00 EA	136.81	0.00	27.36	164.17
42. R&R Angle stop valve	3.00 EA	67.45	3.70	41.20	247.25
43. Install Plumbing fixture supply line	3.00 EA	23.20	0.00	13.92	83.52
Electrical					
44. Detach & Reset 220 volt outlet	1.00 EA				PER BID
45. Detach & Reset Outlet	5.00 EA				PER BID
46. Detach & Reset Switch	5.00 EA				PER BID
47. Detach & Reset Switch - 3 way	1.00 EA				PER BID


State Farm

DEKUN, ANNE

05-80C1-98PC

CONTINUED - Kitchen

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
48. Detach & Reset Recessed light fixture	4.00 EA				PER BID
Finish Carpentry					
49. Window stool & apron	6.00 LF	12.01	2.67	14.96	89.69
50. Baseboard - 3 1/4"	22.23 LF	5.56	4.37	25.60	153.57
Flooring					
51. Carpet - metal transition strip	9.00 LF	5.16	1.48	9.58	57.50
52. Mortar bed for tile	143.32 SF	21.11	23.92	609.88	3,659.29
53. Ceramic/porcelain tile	143.32 SF	32.02	81.80	934.18	5,605.09
Appliances					
54. Detach & Reset Refrigerator - side by side - 22 to 25 cf	1.00 EA	83.74	0.00	16.74	100.48
55. Detach & Reset Range - freestanding - gas	1.00 EA	273.61	0.00	54.72	328.33
56. Install Flexible gas supply line connector - 1/2" - up to 24"	1.00 EA	17.96	0.00	3.60	21.56
57. Dishwasher - Reset	1.00 EA	199.58	0.00	39.92	239.50
58. Dishwasher connection	1.00 EA	225.86	3.53	45.88	275.27
59. Detach & Reset Range hood	1.00 EA	188.41	0.00	37.68	226.09
Misc					
60. Final cleaning - construction - Residential	143.32 SF	0.51	0.00	14.62	87.71
Totals: Kitchen			995.36	5,466.96	32,801.32



Window

7' X 4'

Opens into Exterior

Window

6' 2" X 4'

Opens into Exterior

Window

6' 2" X 4'

Opens into Exterior

Door

3' X 6' 8"

Opens into Exterior

Door

2' 6" X 6' 8"

Opens into CLOSET

Missing Wall

4" X 9'

Opens into KITCHEN

Missing Wall

4" X 9'

Opens into KITCHEN

Door


4' X 6' 8"

Opens into LAUNDRY_ROOM

Door

2' 6" X 6' 8"

Opens into DEF_1_2_BATH



Subroom: Stairs (1)

Height: 9' 9"

39.61 SF Walls

9.43 SF Ceiling

49.04 SF Walls & Ceiling

18.70 SF Floor

4.44 LF Ceil. Perimeter

4.89 LF Floor Perimeter

Missing Wall


4' 3" X 9' 9 3/16"

Opens into FAMILY_ROOM

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
Walls & Ceilings					
61. Seal the walls and ceiling w/latex based stain blocker - one coat	903.08 SF	1.09	8.92	198.66	1,191.94
62. Paint the walls and ceiling - one coat	903.08 SF	1.20	18.73	220.48	1,322.91
63. Paint baseboard - one coat	75.68 LF	1.76	0.97	26.84	161.01
Flooring					
64. Carpet pad	298.70 SF	0.79	15.34	50.26	301.57
65. Carpet	366.00 SF	5.11	114.57	396.98	2,381.81
Misc					
66. Final cleaning - construction - Residential	298.70 SF	0.51	0.00	30.46	182.80

CONTINUED - Family Room

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
Totals: Family Room			158.53	923.68	5,542.04

**Closet****Height: 9'**

137.44 SF Walls
 152.00 SF Walls & Ceiling
 15.27 LF Ceil. Perimeter

14.57 SF Ceiling
 14.57 SF Floor
 15.27 LF Floor Perimeter

Door**2' 6" X 6' 8"****Opens into FAMILY_ROOM**

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

Walls & Ceilings

67. Seal the walls and ceiling w/latex based stain blocker - one coat	152.00 SF	1.09	1.50	33.44	200.62
68. Paint the walls and ceiling - one coat	152.00 SF	1.20	3.15	37.12	222.67
69. Paint door or window opening - 1 coat (per side)	3.00 EA	38.73	1.57	23.56	141.32
70. Paint baseboard - one coat	15.27 LF	1.76	0.20	5.42	32.50


Flooring

71. Carpet pad	14.57 SF	0.79	0.75	2.46	14.72
72. Carpet	38.00 SF	5.11	11.90	41.22	247.30

Misc

73. Final cleaning - construction - Residential	14.57 SF	0.51	0.00	1.48	8.91
---	----------	------	------	------	------

Totals: Closet			19.07	144.70	868.04
-----------------------	--	--	--------------	---------------	---------------




1/2 Bath

Height: 9'

142.50 SF Walls	15.67 SF Ceiling
158.17 SF Walls & Ceiling	15.67 SF Floor
15.83 LF Ceil. Perimeter	15.83 LF Floor Perimeter

Door 2' 6" X 6' 8" Opens into FAMILY_ROOM

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
Walls & Ceilings					
74. Mask and prep for paint - plastic, paper, tape (per LF)	15.83 LF	2.39	0.42	7.64	45.89
75. Seal the walls and ceiling w/latex based stain blocker - one coat	158.17 SF	1.09	1.56	34.80	208.77
76. Paint the walls and ceiling - one coat	158.17 SF	1.20	3.28	38.62	231.70
77. Paint door or window opening - 1 coat (per side)	1.00 EA	38.73	0.52	7.84	47.09
78. Paint baseboard - one coat	15.83 LF	1.76	0.20	5.62	33.68
Finish Carpentry					
79. Baseboard - 3 1/4"	15.83 LF	5.56	3.11	18.22	109.34
Misc					
80. Final cleaning - construction - Residential	15.67 SF	0.51	0.00	1.60	9.59
Totals: 1/2 Bath			9.09	114.34	686.06



Laundry Room

Height: 9'

127.83 SF Walls	18.33 SF Ceiling
146.17 SF Walls & Ceiling	18.33 SF Floor
17.17 LF Ceil. Perimeter	13.17 LF Floor Perimeter

Door 4' X 6' 8" Opens into FAMILY_ROOM

State Farm

DEKUN, ANNE

05-80C1-98PC

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

Walls & Ceilings

81. Seal the walls and ceiling w/latex based stain blocker - one coat	146.17 SF	1.09	1.44	32.14	192.91
82. Paint the walls and ceiling - one coat	146.17 SF	1.20	3.03	35.68	214.11
83. Paint door or window opening - Large - 1 coat (per side)	1.00 EA	45.57	0.62	9.24	55.43

Appliances

84. Detach & Reset Washer/Washing Machine - Front-loading	1.00 EA	81.47	0.00	16.30	97.77
85. Remove Plumbing fixture supply line	1.00 EA	8.58	0.00	1.72	10.30
86. Install Plumbing fixture supply line	1.00 EA	23.20	0.00	4.64	27.84
87. Detach & Reset Dryer - Gas	1.00 EA	235.18	0.00	47.04	282.22
88. Remove Flexible gas supply line connector - 1/2" - up to 24"	1.00 EA	4.30	0.00	0.86	5.16
89. Install Flexible gas supply line connector - 1/2" - up to 24"	1.00 EA	17.96	0.00	3.60	21.56

Misc

90. Final cleaning - construction - Residential	18.33 SF	0.51	0.00	1.88	11.23
---	----------	------	------	------	-------

Totals: Laundry Room			5.09	153.10	918.53
-----------------------------	--	--	-------------	---------------	---------------

Sub Estimates

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
-------------	----------	------------	-----	-------	-----

91. Electrical (Bid Item)	1.00 EA	3,685.00 *EN	0.00	0.00	3,685.00
----------------------------------	----------------	---------------------	-------------	-------------	-----------------

State Farm

DEKUN, ANNE

05-80C1-98PC

CONTINUED - Sub Estimates

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
This item did not previously exist or expands the scope of repairs, but is required by current building codes.					
Please see sub estimate from Gurries Electrical					
Totals: Sub Estimates			0.00	0.00	3,685.00

General Conditions

0.00 SF Walls	0.00 SF Ceiling	0.00 SF Walls & Ceiling
0.00 SF Floor	0.00 SF Short Wall	0.00 LF Floor Perimeter
0.00 SF Long Wall		0.00 LF Ceil. Perimeter

DESCRIPTION	QUANTITY	UNIT PRICE	TAX	GCO&P	RCV
92. Taxes, insurance, permits & fees (Bid Item)	1.00 EA	688.24 *	0.00	137.64	825.88
Permit fees					
93. Dumpster load - Approx. 20 yards, 4 tons of debris	1.00 EA	904.52	0.00	180.90	1,085.42
94. Temporary toilet (per month)	3.00 MO	248.00	0.00	148.80	892.80
95. Temporary hand washing station (per month)	3.00 MO	242.04	0.00	145.22	871.34
97. General Laborer - per hour	10.00 HR	78.06	0.00	156.12	936.72
More Hours may be needed					
Kitchen fire is the source of damage seal and paint is needed though out to cover smoke smell					
98. Plumbing/gas line air pressure test	1.00 EA	292.98	0.00	58.60	351.58
Totals: General Conditions			0.00	827.28	4,963.74

Area Totals: Main Level

1,834.59 SF Walls	648.81 SF Ceiling	2,483.40 SF Walls and Ceiling
609.97 SF Floor	716.99 Total Area	213.41 LF Floor Perimeter
609.97 Floor Area	145.33 Exterior Perimeter of Walls	256.79 LF Ceil. Perimeter
1,287.94 Exterior Wall Area		1,736.11 Interior Wall Area

State Farm

DEKUN, ANNE

05-80C1-98PC

Total: Main Level	1,339.98	9,620.06	61,404.72
Line Item Totals: 05-80C1-98PC	1,339.98	9,620.06	61,404.72

COVERAGE	TAX	GCO&P	RCV
Coverage A - Dwelling - 33 Fire, Lightning, & Removal	1,339.98	9,620.06	57,719.72
Coverage A - Dwelling - 33 Fire, Lightning, & Removal - BC - Code Upgrade	0.00	0.00	3,685.00
Total	1,339.98	9,620.06	61,404.72

Grand Total Areas:

1,834.59 SF Walls	648.81 SF Ceiling	2,483.40 SF Walls and Ceiling
609.97 SF Floor		213.41 LF Floor Perimeter
		256.79 LF Ceil. Perimeter
609.97 Floor Area	716.99 Total Area	1,736.11 Interior Wall Area
1,287.94 Exterior Wall Area	145.33 Exterior Perimeter of Walls	

Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

DESCRIPTION	LINE ITEM QTY	REPL. COST TOTAL	GCO&P	ACV	NON-REC. DEPREC.	MAX ADDL. AMT AVAIL.
APP APPLIANCES						
Detach & Reset Dryer - Gas	1.00 EA	\$282.22	\$47.04	\$282.22	\$0.00	\$0.00
Dishwasher - Reset	1.00 EA	\$239.50	\$39.92	\$239.50	\$0.00	\$0.00
Garbage disposal / disposer - Reset	1.00 EA	\$164.17	\$27.36	\$164.17	\$0.00	\$0.00
Detach & Reset Range hood	1.00 EA	\$226.09	\$37.68	\$226.09	\$0.00	\$0.00
Detach & Reset Refrigerator - side by side - 22 to 25 cf	1.00 EA	\$100.48	\$16.74	\$100.48	\$0.00	\$0.00
Detach & Reset Range - freestanding - gas	1.00 EA	\$328.33	\$54.72	\$328.33	\$0.00	\$0.00
Detach & Reset Washer/Washing Machine - Front-loading	1.00 EA	\$97.77	\$16.30	\$97.77	\$0.00	\$0.00
TOTAL APPLIANCES		\$1,438.56	\$239.76	\$1,438.56	\$0.00	\$0.00
CAB CABINETRY						
Countertop subdeck - plywood	32.00 SF	\$209.79	\$34.98	\$209.79	\$0.00	\$0.00
Add-on for mitered corner (Countertop)	1.00 EA	\$199.40	\$33.24	\$199.40	\$0.00	\$0.00
Countertop - post formed plastic laminate	16.00 LF	\$1,438.53	\$239.76	\$1,438.53	\$0.00	\$0.00
Cabinetry - lower (base) units	16.00 LF	\$7,498.62	\$1,249.78	\$7,498.62	\$0.00	\$0.00
Cabinet panels - side, end, or back	16.00 SF	\$448.51	\$74.76	\$448.51	\$0.00	\$0.00
Toe kick - pre-finished wood - 1/2"	16.00 LF	\$266.71	\$44.46	\$266.71	\$0.00	\$0.00
Cabinetry - upper (wall) units	16.00 LF	\$3,988.66	\$664.78	\$3,988.66	\$0.00	\$0.00
TOTAL CABINETRY		\$14,050.22	\$2,341.76	\$14,050.22	\$0.00	\$0.00
CLN CLEANING						
Final cleaning - construction - Residential	609.97 SF	\$373.30	\$62.22	\$373.30	\$0.00	\$0.00
TOTAL CLEANING		\$373.30	\$62.22	\$373.30	\$0.00	\$0.00
DMO GENERAL DEMOLITION						
Dumpster load - Approx. 20 yards, 4 tons of debris	1.00 EA	\$1,085.42	\$180.90	\$1,085.42	\$0.00	\$0.00
TOTAL GENERAL DEMOLITION		\$1,085.42	\$180.90	\$1,085.42	\$0.00	\$0.00
DRY DRYWALL						
1/2" drywall - hung, taped, ready for texture	239.11 SF	\$1,022.07	\$170.34	\$1,022.07	\$0.00	\$0.00
5/8" drywall - hung, taped, ready for texture	430.54 SF	\$1,921.42	\$320.24	\$1,921.42	\$0.00	\$0.00
Texture drywall - machine - knockdown	430.54 SF	\$803.35	\$133.88	\$803.35	\$0.00	\$0.00
TOTAL DRYWALL		\$3,746.84	\$624.46	\$3,746.84	\$0.00	\$0.00
ELE ELECTRICAL						
Electrical (Bid Item)	1.00 EA	\$3,685.00	\$0.00	\$3,685.00	\$0.00	\$0.00
Detach & Reset 220 volt outlet	1.00 EA	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00

Note: Slight variances may be found within report sections due to rounding

Date: 9/30/2025 3:00 PM

Page: 16

Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

DESCRIPTION	LINE ITEM QTY	REPL. COST TOTAL	GCO&P	ACV	NON-REC. DEPREC.	MAX ADDL. AMT AVAIL.
ELE ELECTRICAL						
Detach & Reset Outlet	5.00 EA	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
Detach & Reset Switch	5.00 EA	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
Detach & Reset Switch - 3 way	1.00 EA	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
TOTAL ELECTRICAL		\$3,685.00	\$0.00	\$3,685.00	\$0.00	\$0.00
FCC FLOOR COVERING - CARPET						
Carpet	404.00 SF	\$2,629.11	\$438.20	\$2,629.11	\$0.00	\$0.00
R&R Carpet - metal transition strip	9.00 LF	\$71.54	\$11.92	\$71.54	\$0.00	\$0.00
Carpet - metal transition strip	9.00 LF	\$57.50	\$9.58	\$57.50	\$0.00	\$0.00
Carpet pad	313.27 SF	\$316.29	\$52.72	\$316.29	\$0.00	\$0.00
TOTAL FLOOR COVERING - CARPET		\$3,074.44	\$512.42	\$3,074.44	\$0.00	\$0.00
FCT FLOOR COVERING - CERAMIC TILE						
R&R Mortar bed for tile floors	119.38 SF	\$1,790.15	\$298.36	\$1,790.15	\$0.00	\$0.00
TOTAL FLOOR COVERING - CERAMIC TILE		\$1,790.15	\$298.36	\$1,790.15	\$0.00	\$0.00
FCW FLOOR COVERING - WOOD						
Detach & Reset T- molding - for wood flooring	16.00 LF	\$51.48	\$8.58	\$51.48	\$0.00	\$0.00
TOTAL FLOOR COVERING - WOOD		\$51.48	\$8.58	\$51.48	\$0.00	\$0.00
FEE PERMITS AND FEES						
Taxes, insurance, permits & fees (Bid Item)	1.00 EA	\$825.88	\$137.64	\$825.88	\$0.00	\$0.00
TOTAL PERMITS AND FEES		\$825.88	\$137.64	\$825.88	\$0.00	\$0.00
FNC FINISH CARPENTRY / TRIMWORK						
R&R Baseboard - 3 1/4"	71.23 LF	\$558.70	\$93.12	\$558.70	\$0.00	\$0.00
Baseboard - 3 1/4"	15.83 LF	\$109.34	\$18.22	\$109.34	\$0.00	\$0.00
Baseboard - 3 1/4"	22.23 LF	\$153.57	\$25.60	\$153.57	\$0.00	\$0.00
Window stool & apron	6.00 LF	\$89.69	\$14.96	\$89.69	\$0.00	\$0.00
TOTAL FINISH CARPENTRY / TRIMWORK		\$911.30	\$151.90	\$911.30	\$0.00	\$0.00
INS INSULATION						
Batt insulation - 10" - R30 - unfaced batt	191.43 SF	\$522.45	\$87.08	\$522.45	\$0.00	\$0.00
Batt insulation - 4" - R13 - unfaced batt	239.11 SF	\$354.42	\$59.08	\$354.42	\$0.00	\$0.00
TOTAL INSULATION		\$876.87	\$146.16	\$876.87	\$0.00	\$0.00
LAB LABOR ONLY						
General Laborer - per hour	10.00 HR	\$936.72	\$156.12	\$936.72	\$0.00	\$0.00
TOTAL LABOR ONLY		\$936.72	\$156.12	\$936.72	\$0.00	\$0.00

Note: Slight variances may be found within report sections due to rounding

Date: 9/30/2025 3:00 PM

Page: 17

Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

DESCRIPTION	LINE ITEM QTY	REPL. COST TOTAL	GCO&P	ACV	NON-REC. DEPREC.	MAX ADDL. AMT AVAIL.
LIT LIGHT FIXTURES						
Detach & Reset Recessed light fixture	4.00 EA	\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
TOTAL LIGHT FIXTURES		\$0.00	\$0.00	\$0.00	\$0.00	\$0.00
PLM PLUMBING						
Dishwasher connection	1.00 EA	\$275.27	\$45.88	\$275.27	\$0.00	\$0.00
Install Sink faucet - Kitchen	1.00 EA	\$159.73	\$26.62	\$159.73	\$0.00	\$0.00
Remove Flexible gas supply line connector - 1/2" - up to 24"	1.00 EA	\$5.16	\$0.86	\$5.16	\$0.00	\$0.00
Install Flexible gas supply line connector - 1/2" - up to 24"	2.00 EA	\$43.12	\$7.20	\$43.12	\$0.00	\$0.00
Plumbing/gas line air pressure test	1.00 EA	\$351.58	\$58.60	\$351.58	\$0.00	\$0.00
Sink - double basin - Reset	1.00 EA	\$197.73	\$32.96	\$197.73	\$0.00	\$0.00
R&R Angle stop valve	3.00 EA	\$247.25	\$41.20	\$247.25	\$0.00	\$0.00
Remove Plumbing fixture supply line	1.00 EA	\$10.30	\$1.72	\$10.30	\$0.00	\$0.00
Install Plumbing fixture supply line	4.00 EA	\$111.36	\$18.56	\$111.36	\$0.00	\$0.00
TOTAL PLUMBING		\$1,401.50	\$233.60	\$1,401.50	\$0.00	\$0.00
PNT PAINTING						
Paint baseboard - one coat	53.33 LF	\$113.47	\$18.92	\$113.47	\$0.00	\$0.00
Paint baseboard - one coat	146.91 LF	\$312.53	\$52.08	\$312.53	\$0.00	\$0.00
Seal floor or ceiling joist system (shellac)	191.43 SF	\$583.79	\$97.30	\$583.79	\$0.00	\$0.00
Mask and prep for paint - plastic, paper, tape (per LF)	15.83 LF	\$45.89	\$7.64	\$45.89	\$0.00	\$0.00
Mask and prep for paint - plastic, paper, tape (per LF)	693.44 LF	\$2,010.99	\$335.18	\$2,010.99	\$0.00	\$0.00
Paint door or window opening - 1 coat (per side)	8.00 EA	\$376.82	\$62.80	\$376.82	\$0.00	\$0.00
Paint door or window opening - Large - 1 coat (per side)	1.00 EA	\$55.43	\$9.24	\$55.43	\$0.00	\$0.00
Paint the walls and ceiling - one coat	693.44 SF	\$1,015.81	\$169.30	\$1,015.81	\$0.00	\$0.00
Paint the walls and ceiling - one coat	1,789.96 SF	\$2,622.09	\$437.02	\$2,622.09	\$0.00	\$0.00
Seal the walls and ceiling w/latex based stain blocker - one coat	2,052.86 SF	\$2,709.46	\$451.56	\$2,709.46	\$0.00	\$0.00
Seal the walls and ceiling w/PVA primer - one coat	430.54 SF	\$545.56	\$90.94	\$545.56	\$0.00	\$0.00
Paint window stool and apron - 1 coat	6.00 LF	\$35.77	\$5.96	\$35.77	\$0.00	\$0.00
Seal stud wall for odor control (shellac)	239.11 SF	\$540.71	\$90.12	\$540.71	\$0.00	\$0.00
TOTAL PAINTING		\$10,968.32	\$1,828.06	\$10,968.32	\$0.00	\$0.00
TIL TILE						

Note: Slight variances may be found within report sections due to rounding

Date: 9/30/2025 3:00 PM

Page: 18

Trade Summary

Includes all applicable Tax, General Contractor O&P, and Labor Minimums

DESCRIPTION		LINE ITEM	REPL. COST	GCO&P	ACV	NON-REC.	MAX ADDL.
		QTY	TOTAL			DEPREC.	AMT
TIL	TILE						AVAIL.
	R&R Ceramic/porcelain tile	119.38 SF	\$5,160.20	\$860.04	\$5,160.20	\$0.00	\$0.00
	Ceramic/porcelain tile	143.32 SF	\$5,605.09	\$934.18	\$5,605.09	\$0.00	\$0.00
	Mortar bed for tile	143.32 SF	\$3,659.29	\$609.88	\$3,659.29	\$0.00	\$0.00
TOTAL TILE			\$14,424.58	\$2,404.10	\$14,424.58	\$0.00	\$0.00
TMP	TEMPORARY REPAIRS						
	Temporary hand washing station (per month)	3.00 MO	\$871.34	\$145.22	\$871.34	\$0.00	\$0.00
	Temporary toilet (per month)	3.00 MO	\$892.80	\$148.80	\$892.80	\$0.00	\$0.00
TOTAL TEMPORARY REPAIRS			\$1,764.14	\$294.02	\$1,764.14	\$0.00	\$0.00
TOTALS			\$61,404.72	\$9,629.58	\$61,404.72	\$0.00	\$0.00

Note: Slight variances may be found within report sections due to rounding

Date: 9/30/2025 3:00 PM

Page: 19

Recap of Taxes, Overhead and Profit

	GC Overhead (10%)	GC Profit (10%)	Material Sales Tax (9.875%)	Storage Rental Tax (9.875%)
Line Items	4,810.03	4,810.03	1,339.98	0.00
Permit	4.76	4.76	0.00	0.00
Total	4,814.79	4,814.79	1,339.98	0.00

State Farm

DEKUN, ANNE

05-80C1-98PC

Recap by Room

Estimate: 05-80C1-98PC

Area: Main Level

Entry Hall		4,634.03	9.19%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal	100.00% =	4,634.03	
Hallway to Bedrooms		5,163.12	10.24%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal	100.00% =	5,163.12	
Kitchen		26,339.00	52.21%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal	100.00% =	26,339.00	
Family Room		4,459.83	8.84%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal	100.00% =	4,459.83	
Closet		704.27	1.40%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal	100.00% =	704.27	
1/2 Bath		562.63	1.12%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal	100.00% =	562.63	
Laundry Room		760.34	1.51%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal	100.00% =	760.34	
Sub Estimates		3,685.00	7.31%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal - BC - Code Upgrade	100.00% =	3,685.00	
General Conditions		4,136.46	8.20%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal	100.00% =	4,136.46	

Area Subtotal: Main Level		50,444.68	100.00%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal	92.69% =	46,759.68	
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal - BC - Code Upgrade	7.31% =	3,685.00	

Subtotal of Areas		50,444.68	100.00%
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal	92.69% =	46,759.68	
Coverage: Coverage A - Dwelling - 33 Fire, Lightning, & Removal - BC - Code Upgrade	7.31% =	3,685.00	

Total		50,444.68	100.00%
--------------	--	------------------	----------------

State Farm

DEKUN, ANNE

05-80C1-98PC

Recap by Category

General Contractor O&P Items	Total	%
APPLIANCES	1,198.80	1.95%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	1,198.80	
CABINETRY	10,962.32	17.84%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	10,962.32	
CLEANING	311.08	0.51%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	311.08	
GENERAL DEMOLITION	904.52	1.47%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	904.52	
DRYWALL	3,069.00	4.99%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	3,069.00	
FLOOR COVERING - CARPET	2,416.50	3.93%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	2,416.50	
FLOOR COVERING - CERAMIC TILE	1,464.79	2.38%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	1,464.79	
FLOOR COVERING - WOOD	42.88	0.07%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	42.88	
PERMITS AND FEES	688.24	1.12%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	688.24	
FINISH CARPENTRY / TRIMWORK	735.26	1.20%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	735.26	
INSULATION	689.42	1.12%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	689.42	
LABOR ONLY	780.60	1.27%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	780.60	
PLUMBING	1,160.57	1.89%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	1,160.57	
PAINTING	9,018.96	14.67%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	9,018.96	
TILE	11,846.62	19.27%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	11,846.62	
TEMPORARY REPAIRS	1,470.12	2.39%
Coverage: Coverage A - Dwelling - 33 Fire, @ 100.00% = Lightning, & Removal	1,470.12	
General Contractor O&P Items Subtotal	46,759.68	76.08%

State Farm

DEKUN, ANNE

05-80C1-98PC

Non-General Contractor O&P Items			Total	%
ELECTRICAL			3,685.00	6.00%
Coverage: Coverage A - Dwelling - 33 Fire, @	100.00% =		3,685.00	
Lightning, & Removal				
Upgrade				
Non-General Contractor O&P Items Subtotal			3,685.00	6.00%
General Contractor O&P Items Subtotal			46,759.68	76.08%
Permits and Fees			47.63	0.08%
Coverage: Coverage A - Dwelling - 33 Fire, @	100.00% =		47.63	
Lightning, & Removal				
Material Sales Tax			1,339.98	2.18%
Coverage: Coverage A - Dwelling - 33 Fire, @	100.00% =		1,339.98	
Lightning, & Removal				
General Contractor Overhead			4,814.79	7.83%
Coverage: Coverage A - Dwelling - 33 Fire, @	100.00% =		4,814.79	
Lightning, & Removal				
General Contractor Profit			4,814.79	7.83%
Coverage: Coverage A - Dwelling - 33 Fire, @	100.00% =		4,814.79	
Lightning, & Removal				
Total			61,461.87	100.00%

Time & Material Breakdown

General Contractor O&P Items	Quantity	Unit Price	Total Cost
APPLIANCES			
Contractor Labor -			
General Laborer	2.12 HR	78.060	165.21*
Plumber	4.42 HR	191.350	845.18*
Electrician	0.93 HR	203.130	188.41*
		Labor:	1,198.80
		APPLIANCES Subtotal:	1,198.80
CABINETRY			
Material -			
Silicone caulk - 10 oz tube	0.61 TB	11.991	7.29*
Cabinetry - upper unit	16.00 LF	123.467	1,975.52*
Sheathing - plywood - 3/4" - CDX	1.11 SH	45.273	50.45*
Wood screw - #10 x 2", 1 lb box	0.56 BX	9.150	5.10*
Countertop - post formed	16.33 LF	42.085	687.08*
4d finish nails (based on 5 lb box)	0.18 LB	3.098	0.57*
Cabinetry - lower unit	16.00 LF	289.849	4,637.60*
Toe kick - pre-finished wood - 1/2"	17.78 LF	3.843	68.33
Construction adhesive	0.17 TB	7.101	1.21
1/4" pre-finished plywood or equal	17.78 SF	6.900	122.69*
		Material:	7,555.84
Contractor Labor -			
Carpenter - Finish, Trim/Cabinet	24.13 HR	135.120	3,260.88*
Carpenter - Finish, Trim/Cabinet	1.06 HR	137.360	145.60
		Labor:	3,406.48
		CABINETRY Subtotal:	10,962.32
CLEANING			
Contractor Labor -			
Cleaning Technician	3.85 HR	80.750	311.08*
		Labor:	311.08
		CLEANING Subtotal:	311.08
GENERAL DEMOLITION			
Equipment -			
Dumpster - Approx. 20 yds, 4 ton of debris	1.00 LO	904.520	904.52
		Equipment:	904.52
		GENERAL DEMOLITION Subtotal:	904.52
DRYWALL			
Material -			
Gypsum board, 1/2"	281.97 SF	0.524	147.75
Metal corner bead	37.13 LF	0.572	21.24
Drywall joint compound - 50 lb box	1.86 BX	17.935	33.39*
Drywall nails (based on 25 to 50 lb box)	1.76 LB	2.311	4.07

State Farm

DEKUN, ANNE

05-80C1-98PC

General Contractor O&P Items

	Quantity	Unit Price	Total Cost
Drywall screws - grabber - (based on 25 to 50 lb box)	3.53 LB	3.397	11.98*
Joint tape - 500' roll	0.45 RL	9.406	4.26*
Gypsum board, 5/8" type X	506.48 SF	0.585	296.29
Drywall texture compound - 50 lb box	1.31 BX	16.404	21.53*
		Material:	540.51
Contractor Labor -			
Drywall Installer/Finisher	16.45 HR	152.410	2,506.96*
		Labor:	2,506.96
Equipment -			
Drywall texture spray machine	0.31 DA	70.000	21.53*
		Equipment:	21.53
		DRYWALL Subtotal:	3,069.00

FLOOR COVERING - CARPET

Material -			
Metal transition strip - 12'	1.67 EA	17.992	30.06*
Carpet pad - rebond, 6 lb	329.76 SF	0.494	162.90
Carpet - Allowance	403.96 SF	3.113	1,257.53
Carpet tackless strip - 400 lf/box	0.27 BX	37.756	10.20*
Carpet seaming tape - 66 lf per roll	0.81 RL	16.024	12.95*
		Material:	1,473.64
Contractor Labor -			
Demolition Laborer	0.15 HR	77.860	11.70*
Flooring Installer	4.89 HR	182.830	894.80*
		Labor:	906.50
Equipment -			
Carpet power stretcher	0.63 DA	40.000	25.01*
Carpet seaming iron	0.63 DA	18.159	11.35*
		Equipment:	36.36
		FLOOR COVERING - CARPET Subtotal:	2,416.50

FLOOR COVERING - CERAMIC TILE

Material -			
Metal lath for plaster application	125.66 SF	0.474	59.56
Dry-set mortar - 50 lb bag	16.58 BG	12.896	213.82
		Material:	273.38
Contractor Labor -			
Tile/Cultured Marble Installer	3.17 HR	275.710	875.05*
Demolition Laborer	3.56 HR	77.860	276.96*
		Labor:	1,152.01
Equipment -			
Cement/mortar mixer, 6 cubic foot	0.56 DA	70.120	39.40*
		Equipment:	39.40
		FLOOR COVERING - CERAMIC TILE Subtotal:	1,464.79

FLOOR COVERING - WOOD

State Farm

DEKUN, ANNE

05-80C1-98PC

General Contractor O&P Items

	Quantity	Unit Price	Total Cost
Material -			
4d finish nails (based on 5 lb box)	0.05 LB	3.098	0.16*
		Material:	0.16
Contractor Labor -			
Wood Flooring Installer	0.29 HR	145.610	42.72*
		Labor:	42.72
FLOOR COVERING - WOOD Subtotal:			42.88

PERMITS AND FEES

Contractor Labor -			
Labor for Taxes, insurance, permits & fees (Bid Item)	1.00 EA	688.240	688.24
		Labor:	688.24
PERMITS AND FEES Subtotal:			688.24

FINISH CARPENTRY / TRIMWORK

Material -			
6d finish nails (based on 5 lb box)	0.82 LB	4.023	3.29*
Baseboard - 3 1/4" finger-jointed pine	115.27 LF	1.860	214.40
Casing - 3 1/4"	6.32 LF	2.643	16.69*
Window stool w/beveled rabbet	6.32 LF	1.600	10.11
		Material:	244.49
Contractor Labor -			
Demolition Laborer	0.71 HR	77.860	55.56*
Carpenter - Finish, Trim/Cabinet	3.22 HR	135.120	435.21*
		Labor:	490.77
FINISH CARPENTRY / TRIMWORK Subtotal:			735.26

INSULATION

Material -			
Insulation - R-30 unfaced batt	202.13 SF	1.288	260.35*
Insulation - R-13 unfaced batt	250.50 SF	0.630	157.81*
		Material:	418.16
Contractor Labor -			
Insulation Installer	2.51 HR	108.260	271.26*
		Labor:	271.26
INSULATION Subtotal:			689.42

LABOR ONLY

Contractor Labor -			
General Laborer	10.00 HR	78.060	780.60
		Labor:	780.60
LABOR ONLY Subtotal:			780.60

PLUMBING

Material -

State Farm

DEKUN, ANNE

05-80C1-98PC

General Contractor O&P Items

	Quantity	Unit Price	Total Cost
Silicone caulk - 10 oz tube	0.09 TB	11.991	1.04*
1/2" Compression angle stop	3.00 EA	12.482	37.44*
Dishwasher drain/discharge hose - up to 6'	1.00 EA	14.994	14.99
Dishwasher water supply line - 6'	1.00 EA	20.707	20.71

Material: 74.18

Contractor Labor -

Demolition Laborer	0.50 HR	77.860	38.62*
Plumber	5.29 HR	191.350	1,011.85*
Plumber	0.19 HR	193.700	35.92*

Labor: 1,086.39

PLUMBING Subtotal: 1,160.57

PAINTING

Material -

Caulking - acrylic	2.72 TB	3.521	9.57*
Latex paint	8.46 GL	67.042	567.48*
Painter's putty	0.65 GL	26.480	17.30*
160 - 180 grit sandpaper - per sheet	13.12 SH	1.030	13.51
Plastic, 2 mil - 9' x 400' roll	1.97 RL	75.980	149.48*
Masking paper, 12" roll	4.37 RL	4.810	21.03*
Masking/painter's tape, 3/4" x 60 yard roll	4.37 RL	4.800	20.99*
PVA - latex drywall primer/sealer	1.22 GL	19.840	24.29*
Sealer - stain blocker - latex based	6.27 GL	31.477	197.40*
Sealer - clear or white pigmented shellac	2.18 GL	87.970	191.89*
Paint thinner - Alcohol - denatured	0.60 GL	25.540	15.25*

Material: 1,228.19

Contractor Labor -

Painter	60.65 HR	128.450	7,790.77*
---------	----------	---------	-----------

Labor: 7,790.77

PAINTING Subtotal: 9,018.96

TILE

Material -

Ceramic tile grout - 25 lb bag	4.17 BG	30.480	127.13*
Thinset - multipurpose latex fortified - 50 lb bag	3.65 BG	21.614	78.88*
Metal lath for plaster application	150.59 SF	0.474	71.39*
Dry-set mortar - 50 lb bag	13.25 BG	12.896	170.82*
Ceramic/porcelain tile	291.97 SF	4.495	1,312.40*

Material: 1,760.62

Contractor Labor -

Tile/Cultured Marble Installer	34.45 HR	275.710	9,498.36*
Demolition Laborer	5.26 HR	77.860	409.47*

Labor: 9,907.83

Equipment -

Ceramic tile saw	1.13 DA	65.000	73.55*
Cement/mortar mixer, 6 cubic foot	1.49 DA	70.120	104.62*


State Farm

DEKUN, ANNE

05-80C1-98PC

General Contractor O&P Items	Quantity	Unit Price	Total Cost
		Equipment:	178.17
		TILE Subtotal:	11,846.62
TEMPORARY REPAIRS			
Equipment -			
Portable toilet	3.00 MO	248.000	744.00
Portable hand washing station	3.00 MO	242.040	726.12
		Equipment:	1,470.12
		TEMPORARY REPAIRS Subtotal:	1,470.12
Material			13,569.17
Labor			30,540.41
Equipment			2,650.10
General Contractor O&P Items Subtotal			46,759.68
Non-General Contractor O&P Items	Quantity	Unit Price	Total Cost
ELECTRICAL			
Supplies -			
Supplies for Electrical (Bid Item)	1.00 EA	1,510.850	1,510.85
		Supplies:	1,510.85
Contractor Labor -			
Labor for Electrical (Bid Item)	1.00 EA	2,174.150	2,174.15
		Labor:	2,174.15
		ELECTRICAL Subtotal:	3,685.00
Supplies			1,510.85
Labor			2,174.15
Non-General Contractor O&P Items Subtotal			3,685.00
General Contractor O&P Items Subtotal			46,759.68
Permit			47.63
Material Sales Tax			1,339.98
General Contractor Overhead			4,814.79
General Contractor Profit			4,814.79
Total			61,461.87


 Anne Dekun (Dec 11, 2025 16:36:21 PST)

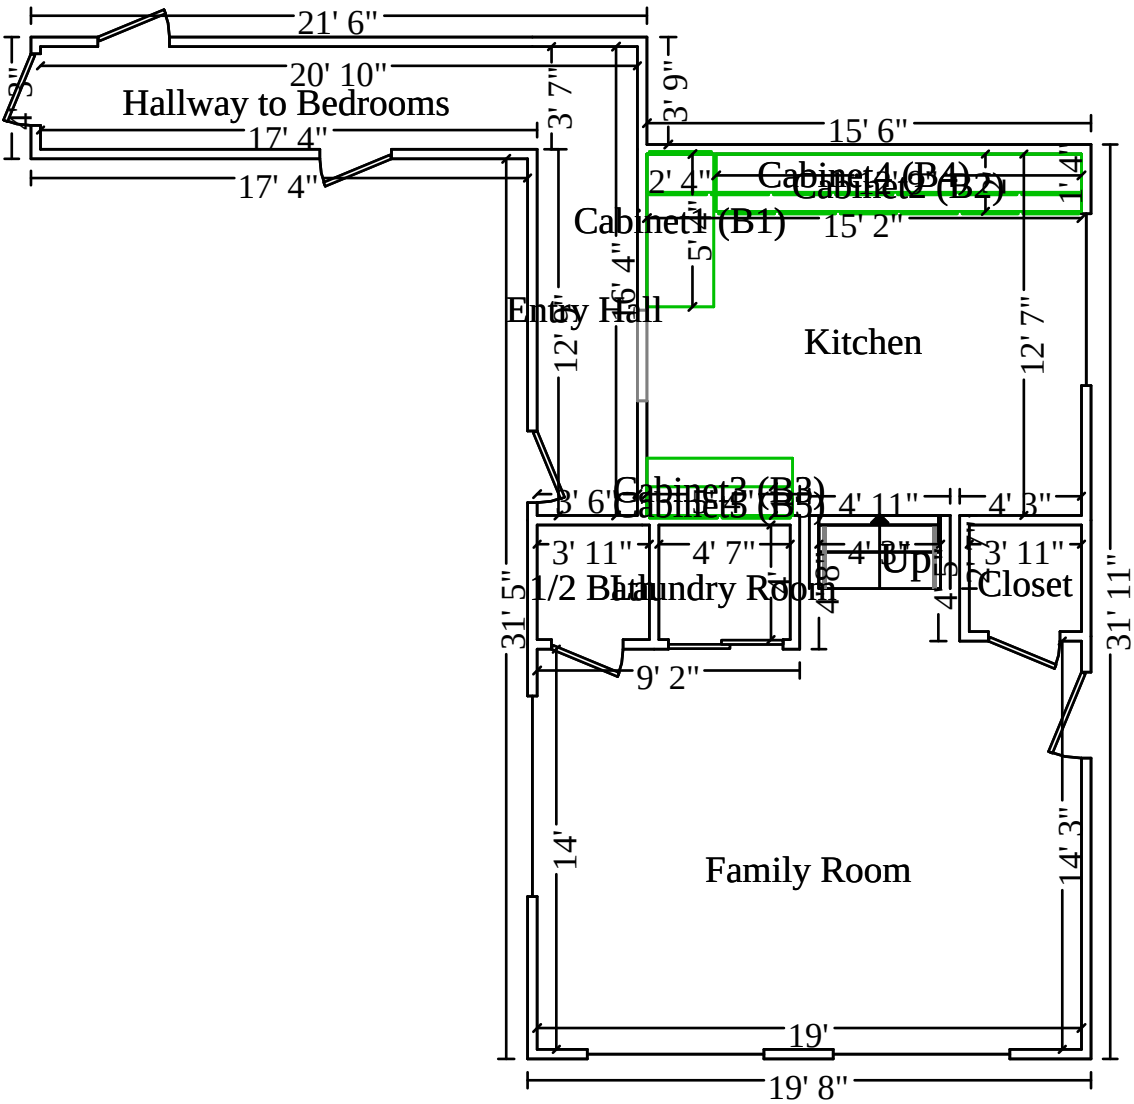

Main Level